

A Product of **Pathframe Industries** 







As a brand, "CubiQ" stands as a market leader and trusted name in modern restroom solutions. With 30 years of industry experience, we specialise in providing state-of-the-art Restroom Cubicles, Lockers, Urinal privacy panels, and Exterior claddings, seamlessly combining durability with aesthetic appeal.



**CubiQ** is the flagship brand of **Pathframe** Industries, specialising in the **design**, **manufacturing**, **and installation** of modern restroom cubicles. We provide tailored solutions to meet the diverse needs of clients across various sectors. Using the best materials and the latest technology, we offer **high-quality cubicles** that serve as a modern, aesthetically pleasing alternative to traditional brick cubicles.

# Why Us?

We offer the highest-grade material in the market, using premium 316-grade stainless steel for exceptional durability, corrosion resistance, and long-lasting quality.

#### **Quality Materials**



**Innovative Designs** 




**Customer Satisfaction** 



**Expert Installation** 



**Highest Grade Quality** 

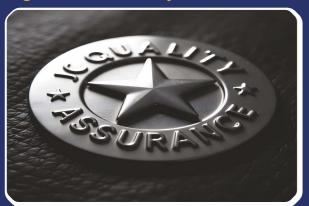

**Three Decades of Expertise** 



# Our Vision

To lead the market by delivering **high-quality**, **innovative products** that not only meet but set industry trends, raising the standard for restroom solutions.

# Our Mission

We take pride in our **customer-centric approach**, continuously raising restroom standards through innovative solutions that are durable, easy to maintain, and aesthetically pleasing. Our products are designed to enhance user experience while meeting the practical demands of high-traffic spaces. From the initial consultation to installation and after sales support, we ensure a **seamless and satisfying experience** at every step.



# **OUR OFFERINGS**







LOCKERS







**EXTERIOR CLADDINGS** 



# Restroom Cubicles



CubiQ restroom cubicles are high-quality modular systems crafted from premium materials, offering flexibility, durability, and customisation for diverse spaces like offices, healthcare, and public areas, all while ensuring modern aesthetics and easy installation.

## **Accessories**





## **The Neon Series**



The Neon Series combines magnificent design with exceptional functionality, making it one of our most popular choices. Crafted with 12 mm thick HPL compact laminates, this model features stainless steel hardware paired with an extruded anodised aluminium top rail and fixing channels. Ideal for users who seek a highly adaptable, budget-friendly restroom solution without compromising on quality, this series is a preferred choice worldwide.

# **Other Range**

SR. NO.	RANGE OF CUBICLES	HPL BOARD	PROFILES	HARDWARES
1	ONEX	12MM	ALUMINIUM BLACK POWER COATED 63400 T6/ 6060 ALLOY	NYLON
2	NEON	12MM	ALUMINIUM ANODISED 63400 T6/ 6060 ALLOY	S S 316
3	SILVERA	12MM	STAINLESS STEEL 304	S S 316
4	SILVERA PRO	12MM	STAINLESS STEEL 304	S S 316
5	SWING LITE	12MM	ALUMINIUM ANODISED 63400 T6/ 6060 ALLOY	S S 316
6	PREMIA 12&18MM	12MM/18MM	STAINLESS STEEL 304	S S 316
7	TOP HUNG	12MM/18MM	STAINLESS STEEL 304	S S 316
8	CB DOORS	12MM	ALUMINIUM BLACK POWER COATED 63400 T6/ 6060 ALLOY	NYLON
9	HANSEL SERIES	12MM	ALUMINIUM BLACK POWER COATED 63400 T6/ 6060 ALLOY	NYLON
10	LILLIPUT	12MM	STAINLESS STEEL 304	S S 316
11	PETER PAN	12MM	ALUMINIUM ANODISED 63400 T6/ 6060 ALLOY	S S 316
12	TEENY WEENY	12MM	STAINLESS STEEL 304	S S 316
13	AERO	12MM	ALUMINIUM BLACK ANODISED 63400 T6/ 6060 ALLOY	NYLON

cubiq.in

# Lockers

Our lockers feature state-of-the-art hardware design, offering an extensive range of customised styles and sizes to meet your individual storage needs. Whether for a changing room, library, clubhouse, gym, swimming pool, or school, our lockers are the perfect solution for every application.



Types of lockers: A type locker | L type locker

## **Application Areas**







**Changing Room** 



Staff Room





Library



Stadium



Gymnasium



Sports Complex

Labs

## **Technical specification**

ТҮРЕ	DESCRIPTION	HANGING LENGTH (MM)	DOOR SIZE (MM)
A1	Single-door locker unit. Conventional style with hat and hanging space. Any application.	1400	1830
A2	Two door locker unit. Hanging rail. Any application.	800	917
А3	Two door locker unit. Hanging rail. Any application.	NA	610
A4	Four door locker unit. Bag storage.	NA	457
A5	Five door locker unit. Small bag and personal items.	NA	366
S	Two door interlocking type. Extra long hanging length. Suitable for: Uniforms and dresses. Designed for Hospital staff, nurses etc.	1000	1045
С	Single-door locker unit. For use on a high plinth. Hanging and bad storage.	NA	1380
3	Open storage compartment in 3 shelves.	NA	460
В	Bench attached to locker.	NA	NA

#### **MATERIALS**

All accessories shall be made of SS and Aluminium. The door, side & back and top & bottom shall be High-Pressure Laminates (HPL) Compact Board. HPL compact boards are manufactured from sheets of special kraft and décor paper, impregnated with thermosetting synthetic resins which are together under heat and high pressure (110 Kg/cm2 at a temperature of about 150°C). HPL compact board has laminates on both sides with suede finishes melamine. The performance of the board is tested according to Standards EN438 - 4 (Equivalent to Indian standard IS-2046) (Boiling Water, Fire Rate, Impact, Stain, and Scratch).

All doors shall be made of a 9 mm or 12mm thick HPL compact panel.

#### **SIDE & BACK DIVIDER**

All doors shall be of 3 mm thick HPL compact board.

#### **TOP & BOTTOM DIVIDER**

All doors shall be of 9 mm thick HPL compact board.

#### HARDWARE AND ACCESSORIES

- Each restroom locker system will be equipped with the following accessories Standard - Aluminium + SS
- Hanger Rod (If required) SS Hinges
- · Aluminium Interlocking supporting frame

#### **SERVICE INCLUSIONS**

- 1. Identification of the project requirement 2. Design advisory
- 3. Product and solution proposal 4. Specification writing 5. Project estimation
- 6. CAD layout drawings 7. Delivery 8. Installation 9. After-sales support
- 10. Warranty 11. Maintenance 12. Complementary products and services.

#### **TURN-KEY SOLUTIONS**

Full service concept is your assurance for a successful completion and peace of mind in project

# Urinal Privacy Panels



These panels provide privacy and hygiene in restroom environments, serving as effective separators between adjacent urinals in men's restrooms. Constructed from durable and easy-to-clean materials, they offer a practical solution for enhancing restroom functionality.



# **Technical specification**

#### TOILET CUBICLES AND ASSOCIATED WORKS

**SCOPE OF WORK**: Providing & fixing Restroom UPP in 12mm thickness (standard dimension of 450mm width x 900mm Height) Panel starts 500-600mm above ground level.

**COMPACT LAMINATE:** 12mm thick Compact Laminate made as per IS: 2046 and as per fire retardant EN-438 (Section 30 CGS) standard. These panels are 12mm thick solid compact laminates that are heat, bacteria, water, chemical, scratch, and impact-resistant, as per the approved texture/shade. The product should have Green Guard Certificate.


**ACCESSORIES:** Urinal Privacy Panel will be fixed with stainless steel Grade-316 right angle bracket, i.e. (a) Right Angle Brackets, (b) Screws, and (c) Wall Plugs.


**FIXING DETAIL**: All screws will be of Grade-304 in stainless steel & panel will be supported by right angle brackets to hold the panels with a clearance height upto 500-600mm.

Standard dimension of 450mm Width x 900mm Height.
All aspects specified by the manufactures, Restroom UPP or equivalent.



# Types of Urinal Privacy Panels

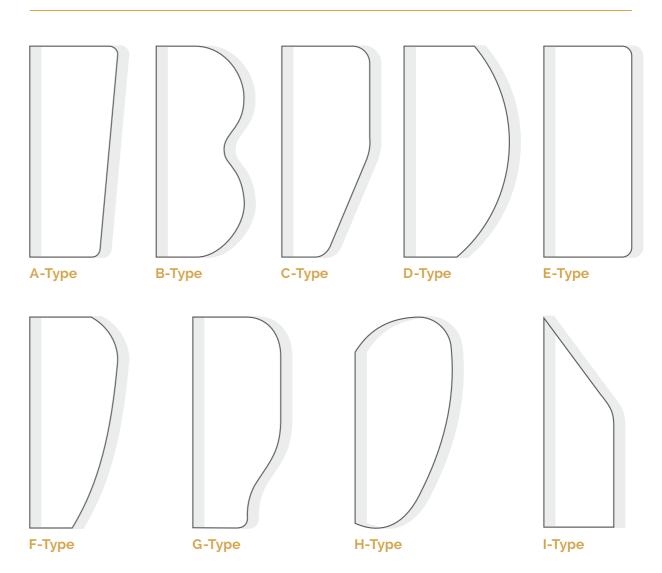

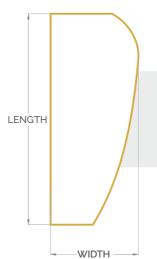

\*Length = 900 mm, Width = 450 mm and Panel Thickness = 12/18 mm

NOTE: The dimensions shown here are standard dimensions only. However, specialised dimensions are also made on specific requirement.

# Exterior Claddings



Crafted using imported design papers with highly stable and resistant pigments, our laminates guarantee long-lasting freshness, year after year. Ideal for building façades, cladding, balconies, verandahs, fences, outdoor benches, and more, our laminates offer durability and aesthetic appeal for a range of outdoor applications.



## **Features & Benefits**

- Decorative
- Highly Weather-resistant
- Optimal Lightfastness
- · Scratch-resistant
- · Solvent-resistant
- Self-supporting
- Impact-resistant
- Heat-resistant

- Fire-resistant
- Easy to Clean & Maintain
- · Lightweight Substructure & Facade
- Sustainable
- Quick & Easy to Assemble
- · Increased Soundproofing
- Reduced Air-conditioning Costs
- · Wall Protection & Heat Insulation




# **Technical specification**

Sr.No.	Properties	EDF Grade Specification As per EN 438-part 6	Values
1	Thickness (mm) (max.)	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
	5.00≤ t <18.00 (mm)	6.00 ± 0.40 mm	6.15 mm
2	Length (mm)	2440.00 + 10.00/-0.00 mm	2441.00 mm
3	Width (mm)	1220.00 + 10.00/-0.00 mm	1221.00 mm
4	Edge Straightness mm. (max.)	1.50 mm/m	0.90 mm/m
5	Edge Squareness mm (max.)	1.50 mm/m	0.80 mm/m
	Flatness mm (max.)		
6	2.00≤ t <16.00 mm	8.00 mm/m	4.00 mm/m
6	6.00≤ t <110.00 mm	5.00 mm/m	2.50 mm/m
	t≽ 10.00 mm.	3.00 mm/m	1.30 mm/m
7	Flexural Modulus (min.)	9000 Mpa.	13966 Mpa
8	Flexural Strength (min.)	80 Mpa.	114 Mpa.
9	Tensile Strength (min.)	60 Mpa.	66 Mpa.
10	Density, gm./cm3 (min.)	1.35 gm/cm3	1.45 gm/cm
	Resistance to impact by large diameter ball		
	a) Drop height mm (min.)		
11	2.00≤ t ≤15.00 mm (t=nominal thickness)	1400 mm	1600 mm
	t≽ 5.00 mm	1800 mm	2000 mm
	b) Indentation dia mm (max.)	10 mm	6 mm
	Resistance to wet conditions		
	a) Mass increase (%) max		
12	2.00≤ t ≤5.00 mm (t=nominal thickness)	10%	4%
	t≽ 5.00 mm	8%	3%
	b) Appearance not worse than	Rating 4	Rating 5
	Dimensional stability at elevated temperature		
	2.00≤ t ≤5.00 mm (t-nominal thickness)		
	a) Longitudinal, % max	0.30%	0.25%
13	b) Transverse, % max	0.60%	0.40%
	t≽ 5.00 mm		
	a) Longitudinal, % max	0.30%	0.12%
	b) Transverse, % max	0.60%	0.10%
	Resistance to climatic shock		
14	a) Appearance	Rating 4	Rating 4
	b) Flexural Strength index, min.	0.95	1.10
	c) Flexural Modulus index, min.	0.95	1.50
	Resistance to artificial weathering	After 650MJ/m2 radiant	1500 hrs
15	(Including Light Fastness)	Exposure (1500 hrs)	
-5	a) Gray scale rating (not worse than)	Rating 3	Rating 4
	b) Appearance (min.)	Rating 4	Rating 4
	Resistance to UV light	After 1500 hrs Exposure	1500 hrs
16	a) Gray scale rating (not worse than)	Rating 3	Rating 4
	b) Appearance (min.)	Rating 4	Rating 4

Remark: E (Exterior Grade), D (Serve Use), F (Flame Retardant Grade)

# Material Composition

These compact sheets are built from multiple layers of high-quality kraft paper, impregnated with thermosetting resins and compressed under high pressure, offering exceptional strength and durability.

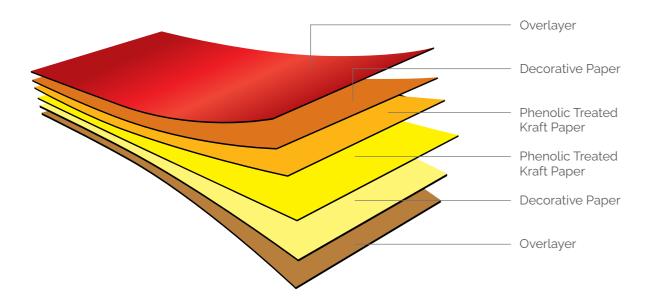

- Solid and Compact Laminate: Constructed from a phenolic core board.
- Layered Structure: Composed of layers of cellulose fibrous material (usually paper) impregnated with thermosetting resins.
- High-Pressure Processing: Created using high pressure (over 5 MPa) and heat (above 120°C) to ensure the flow and curing of resins, resulting in a homogeneous, non-porous material with increased density (over 1350 kg/m³).
- **Decorative Surfaces:** Both sides feature surfaces with decorative colours or designs, treated with **melamine-based resins.**
- · Manufacturing Standards: Complies with EN-438/IS2048 standards for quality assurance.
- Antibacterial Options: Available with enhanced antibacterial properties under the name 'AB+', making them ideal for environments prone to bacteria, such as nursing homes, hospitals, and gyms.
- Bacteria Resistance: Ideal for areas like toilets in nursing homes, pathological labs, medical research facilities, and locations where bacteria spread quickly, such as gyms and swimming pools.

## **Advantages of Using CubiQ Cubicles**







Graffiti Resistant Te



Termite Resistant



Water Resistant



Easy to Clean



Impact Resistant



Anti-Bacterial



Cigarette Burn Resistant



Fire Resistant



Abrasion Resistant



Flexible Design with Space-Saving Options



Chemical Resistant



Fast Colour Retention and Durability



Wide Choice of Colours



Low Volatile Organic Compound (VOC) Emission

# **Our Applications**

- · Commercial, Retail, and Cinema
- Travelling Hotspot
- · Industries and Warehouses
- Tourist, Religious, and Public Places
- · Sports, Recreation, and Wellness
- Educational Institutions
- Healthcare
- Private and Public Offices



## **Our Certifications**





















## **Our Esteemed Clientele**

















































### **Our Esteemed Clientele**











































































































Note: Warranty applicable only against manufacturing defects.



#### A Product of **Pathframe Industries**

- Office Address:
  - 202/A, Shivalik-10, Opp. SBI Zonal Office Ambawadi, Ahmedabad - 380015
- **C** Contact:
  - +91 99241 32951, 079 26305158
- Email:
  - info@cubiq.in
- Manufacturing Plant:

A-23, Kalpataru Industrial Estate, Beside Sarvoday Hotel Moraiya Village, Changodar, Ahmedabad - 382213





